thermostat cartridge, Start/stop valve to operate the functions

Thermostat for concealed installation for 5 functions with integrated shower holder

Article Number: 15358600

- depending on volume flow and installation situation • approx. 50% flow rate reduction and integrated shut off function
- · Select push-button on/off control for 5 outlets
- · simultaneous use of several outlets


· consists of: Thermostat, shower holder

- · maximum flow rate at 3 bar: 38 l/min
- . flow rate per outlet: 26 l/min
- · flow rate by simultaneous use of all outlets: 38 l/min
- min. operating pressure: 1 bar
- · max. operating pressure: 10 bar
- . safety stop at 40 °C
- · temperature limitation adjustable
- · non-return valve

Product image

- for shower hoses with conical or cylindrical nut on . both sides
- thermostat is delivered with buttons hand shower, Waterfall, Rain large, Mono, body shower

connection type: basic set

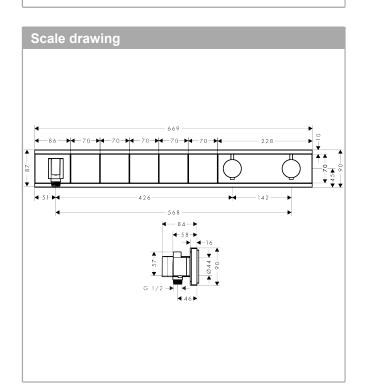





Certificates / Sustainability

WaterMark

RainSelect

Description

product features

5 functions

.

Finish: Black/Chrome

hansgrohe

RainSelectThermostat for concealed installation for 5 functions with integrated shower holderFinish: Black/ChromeArticle Number: 15358600



