

# **Combination Eye/Face Wash & Showerhead**



## Model RBA8302-340

#### **Materials & Features**

Pedestal mounted eye/face wash with stainless steel bowl, ABS plastic eye/face wash spray heads, an in-line strainer and 15mm stay open ball valve with push handle. The shower has a stainless steel showerhead and 25mm stay-open ball valve with pull rod. The unit complies with AS4775 / ANSI Z358.1 and is provided with a universal identification sign and a waterproof weekly inspection card.

### **Technical Detail**

Max Inlet Pressure: 500 KPa

Inlet: 32mm Female BSP top side inlet

Waste Outlet [face wash]: 32mm Female BSP

Flow Rate: 90 L/min

Min Supply: Needs to be hydraulically calculated

Showerhead Valve: 25mm Pull Rod: 735mm

Bowl: 300mm diam, Stainless Steel

#### Installation

32mm schedule 40 stainless steel pipe, with 117mm floor fixing flange, fixing by other, installation should be in accordance with AS 4775 / ANSI Z358.1 and local authority requirements.


Available Models RBA8302-340

Combination station, Eye/Face Wash and Showerhead

Related Products RBA8302-300

Pedestal Mounted Emergency Shower

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

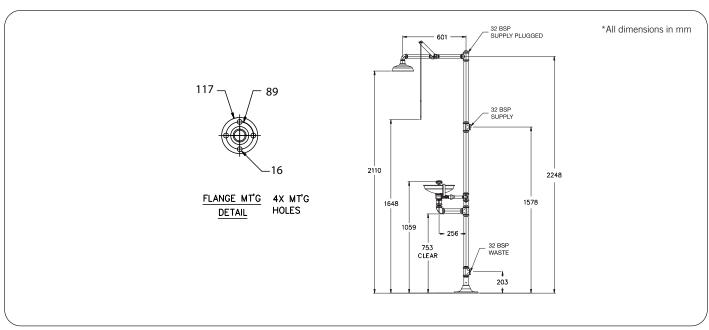



As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 03/24 © 2024 by RBA Group TD/Model RBA8302-340/0324