




Technical Data

TrimLineSeries™ SURFACE-MOUNTED WASTE RECEPTACLE WITH DISPOSAL DOOR

B-35639

Specify Finish Required

- Stainless Steel, Satin Finish
- Matte Black Finish, please use model no. 35639.MBLK

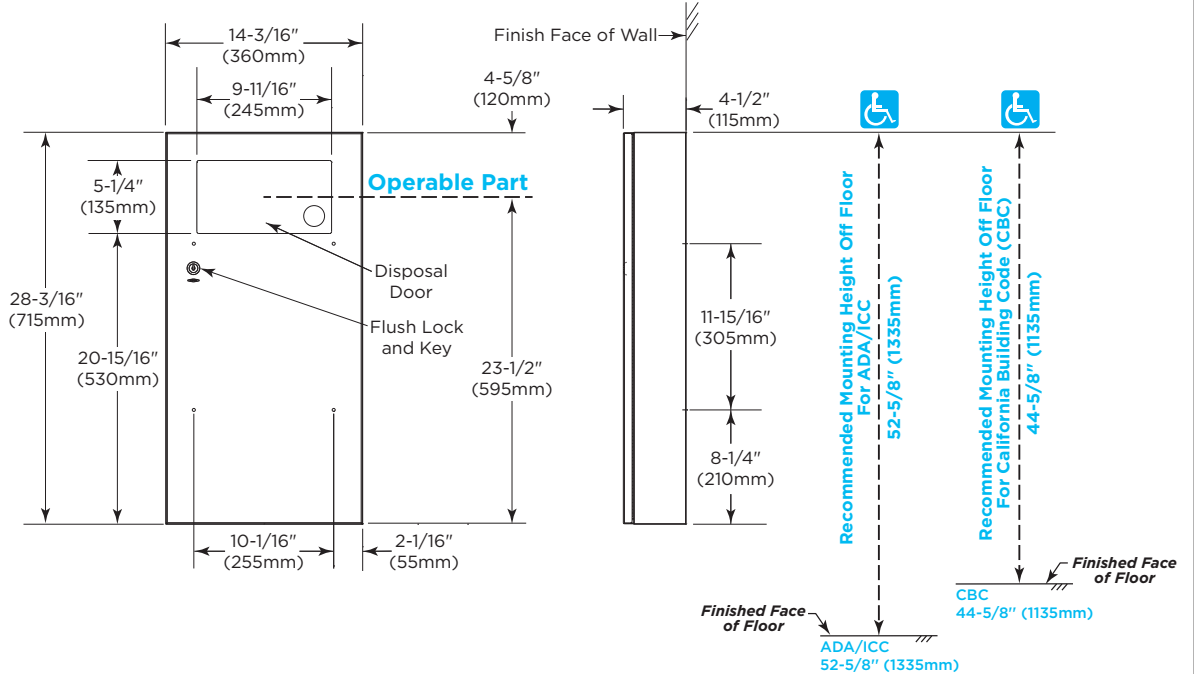

ADA/CBC Installation Guidance

***Operable Part:** Center of waste disposal push door.

Maximum mounting height of Operable Part:

ADA/ICC: 48" above finished floor (AFF)

CBC: 40" above finished floor (AFF)

*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

MATERIALS:

Cabinet — 18-8, Type-304, heavy-gauge stainless steel. All-welded construction. Exposed surfaces have satin finish or matte black, as specified.

Skirt — 18-8, Type-304, stainless steel with satin finish or matte black, as specified.

Door — 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin finish or matte black, as specified. Secured to cabinet with a concealed, full-length stainless steel piano-hinge. Equipped with one tumbler lock keyed like other Bobrick washroom accessories. Tumbler lock flush with the door - no protrusion. Self-closing push door mounted on continuous stainless steel piano hinge.

Disposal Door — 18-8, Type-304, heavy-gauge stainless steel with satin finish or matte black, as specified. Secured to cabinet with spring-loaded, full length stainless steel piano hinge. Equipped with International graphic symbol identifying waste disposal.

Waste Receptacle — 18-8, Type-304, heavy-gauge stainless steel. All-welded construction. Removable for servicing. Capacity: 3-gal. (11.3-L).

continued . . .

OPERATION:

To service waste receptacle, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls.

INSTALLATION:

Mount unit on wall with four #10 x 1-1/4" (4.8 x 32mm) sheet-metal screws (not furnished) at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 3/16" (5mm) toggle bolts or expansion bolts. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between cabinet and finish face of wall.

Replacement Parts:

Skirt Replacement Kit	35639-53
Door Replacement Kit	35639-173
Waste Receptacle Replacement Kit	35639-83

SPECIFICATION:

Surface-mounted waste receptacle with disposal door shall be Type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish or matte black, as specified. Door shall be Type-304, 18 gauge (1.2mm) secured to cabinet with a concealed, full-length stainless steel piano-hinge, cable door-swing limiter and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Tumbler lock flush with the door - no protrusion. Waste receptacle shall be Type-304, heavy-gauge stainless steel. All-welded construction with a capacity of 3-gal. (11.3-L).

Surface-Mounted Waste Receptacle with Disposal Door shall be Model B-35639 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.