

# Cube Invisi II Urinal Suite

## Vitreous China Wall-Hung Boxed Rim Urinal with Invisi II Cistern for Inwall, Induct or Inceiling applications

A contemporary design fully integrated box rim, wall mounted urinal with a concealed trap and easy to clean surfaces for low cost maintenance. The box rim flush provides for the wash down of the entire inside area of the bowl on each flush. The grate is vitreous china and factory fitted. Concealed cistern and plumbing fittings provide space saving, ease of cleaning and performance matched components to maximise flushing efficiency.

**Cube Invisi II** urinal suite inwall/induct/inceiling Code No. 771600 (buttons sold separately).

**Cube Urinal** available as a separate item Code No. 678655.

**Traps:** P-trap only.

**Inlet:** Back inlet for concealed nominal 20mm dia. sparge pipe and compression rubber fitting.

**Outlet:** The urinal trap is connected to the wall waste pipe which allows for a simple push on urinal connection.

**Cistern:** **Invisi II** cistern – suitable for inwall, induct and inceiling applications. Achieves a 3 star water efficiency rating when installed as a single stall urinal. Buttons are supplied separately, see Invisi II Cistern page for available options. For inwall applications a blank access panel and remote single flush button are required. For induct or inceiling applications, where access is available to the cistern and button, either the remote or custom buttons are suitable.

**Fixing:** The **Cube** urinal is fixed to the wall with the D.167 Concealed Fixing Bracket supplied.

**Invisi II Cistern** is simply mounted into position by clipping onto the two quick clip mounting brackets which are secured with screws to the studwork or induct brickwork. Cistern brackets supplied.

**Installation:** Refer to *Important Information for Plumbers* section.


**Colours:** White only.




# Cube Invisi II Urinal Suite (continued)

## Cube Invisi II Urinal Inwall/Induct Installation

### Inwall Urinal Suite

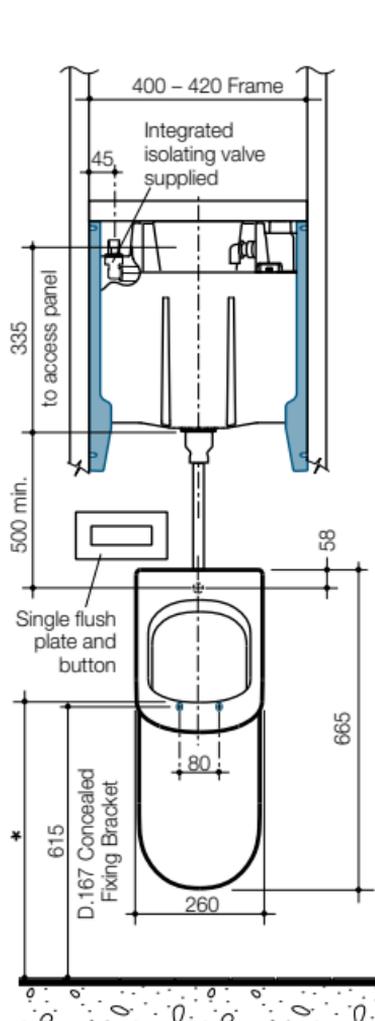

\* 610mm recommended standard height.  
400mm recommended disabled height

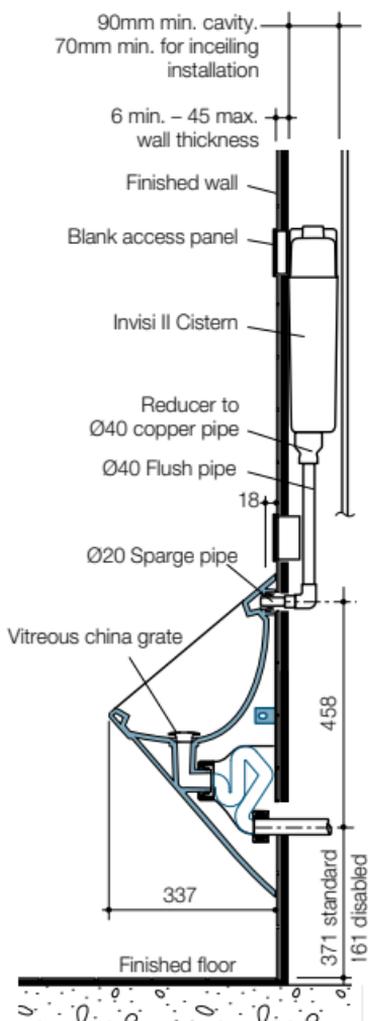

### Induct Urinal Suite

