



1 Cut a mounting hole 35mm in diameter. There must be a minimum 12mm clearance around the hole.

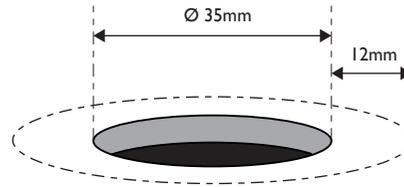

3 Underneath the Mounting Hole, feed the Rubber Mounting Gasket then the Mounting Plate onto the Threaded Rod. Screw on the locknut next.

Firmly fasten the Locknut using the provided Locknut Spanner.

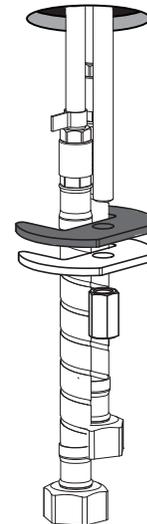

2 Insert the rubber washer into the groove.


Screw the Threaded Rod into the Mixer Body.

Screw the Red Marked Hose into the hot water inlet marked with red tape.

Screw the Blue Marked Hose into the cold water inlet.


Feed hoses through the hole.

Place the mixer into position.

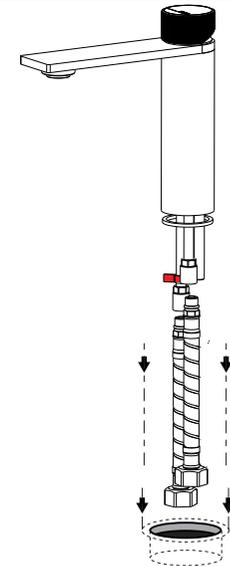

4 Connect hoses to the water supply.

Test and check for leaks.

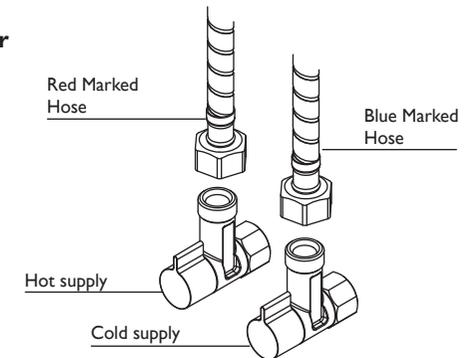

recommended working pressure
150-500 KPa
maximum hot water temperature
55 degrees



NOTE:
- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 55°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements. Showers may not be suitable for use within:
• Gravity-fed water systems

• Pressure supply less than 150kPa;
NOTE: After installing this product, retighten the flow controller housing to prevent removal by hand.

Failure to comply with the above may void all warranties.

WARRANTY:
Please refer to the full warranty statement enclosed with the product before installing. Or visit

MAINTENANCE AND CARE:
- Products should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:
While we aim to ensure the specifications shown are correct at the time of printing, Phoenix Tapware reserves the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.