


Mecca Wall Basin/Bath Mixer Handle Up Trim Kits Only


Nero

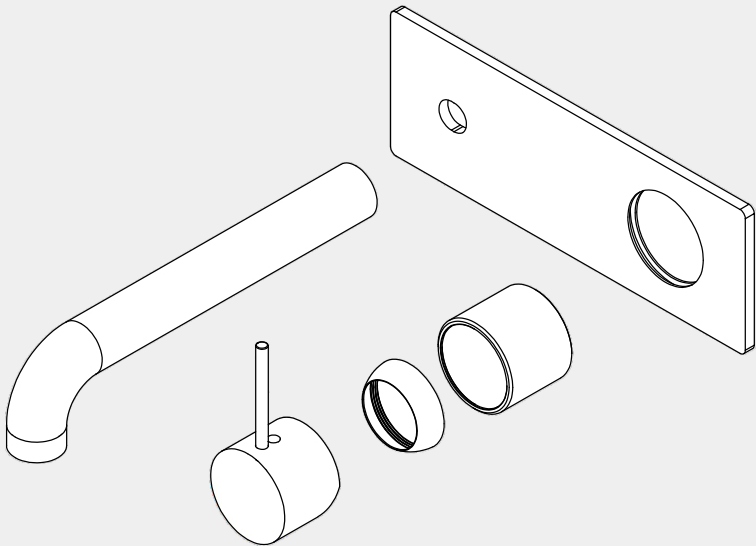


Versions:202401

Drawing	Specifications	Packaging Includes								
The top view shows a rectangular plate with a width of 200 and a height of 70. A spout is mounted on the left side, with a distance of 120 from the center of the spout to the right edge. A handle is mounted on the right side, with a distance of 33.9 from the center of the handle to the top edge. The side view shows the spout with a height of 35 and a 25° angle. The handle is shown with a height of 132/172/197/242/272 and a distance of 120/160/185/230/260 from the center of the handle to the right edge.	Watermark License WM-060073 Temperature Rating Min 1°C-Max 75°C Pressure Rating Min 150kpa - Max 500kpa	1x Spout 1x Plate 1x Handle 1x Cartridge Bell 1x Dressing Ring								
Finish & SKU										
<table><tr><td> Chrome NR221910b(120/160/185/230/260)tCH</td><td> Gun Metal NR221910b(120/160/185/230/260)tGM</td></tr><tr><td> Matte Black NR221910b(120/160/185/230/260)tMB</td><td> Brushed Gold NR221910b(120/160/185/230/260)tBG</td></tr><tr><td> Brushed Bronze NR221910b(120/160/185/230/260)tBZ</td><td> Brushed Nickel NR221910b(120/160/185/230/260)tBN</td></tr><tr><td> Matte White NR221910b(120/160/185/230/260)tMW</td><td></td></tr></table>			Chrome NR221910b(120/160/185/230/260)tCH	Gun Metal NR221910b(120/160/185/230/260)tGM	Matte Black NR221910b(120/160/185/230/260)tMB	Brushed Gold NR221910b(120/160/185/230/260)tBG	Brushed Bronze NR221910b(120/160/185/230/260)tBZ	Brushed Nickel NR221910b(120/160/185/230/260)tBN	Matte White NR221910b(120/160/185/230/260)tMW	
Chrome NR221910b(120/160/185/230/260)tCH	Gun Metal NR221910b(120/160/185/230/260)tGM									
Matte Black NR221910b(120/160/185/230/260)tMB	Brushed Gold NR221910b(120/160/185/230/260)tBG									
Brushed Bronze NR221910b(120/160/185/230/260)tBZ	Brushed Nickel NR221910b(120/160/185/230/260)tBN									
Matte White NR221910b(120/160/185/230/260)tMW										
*Dimensions are nominal measurements only.										


Installation Instruction For Trim Kits Only

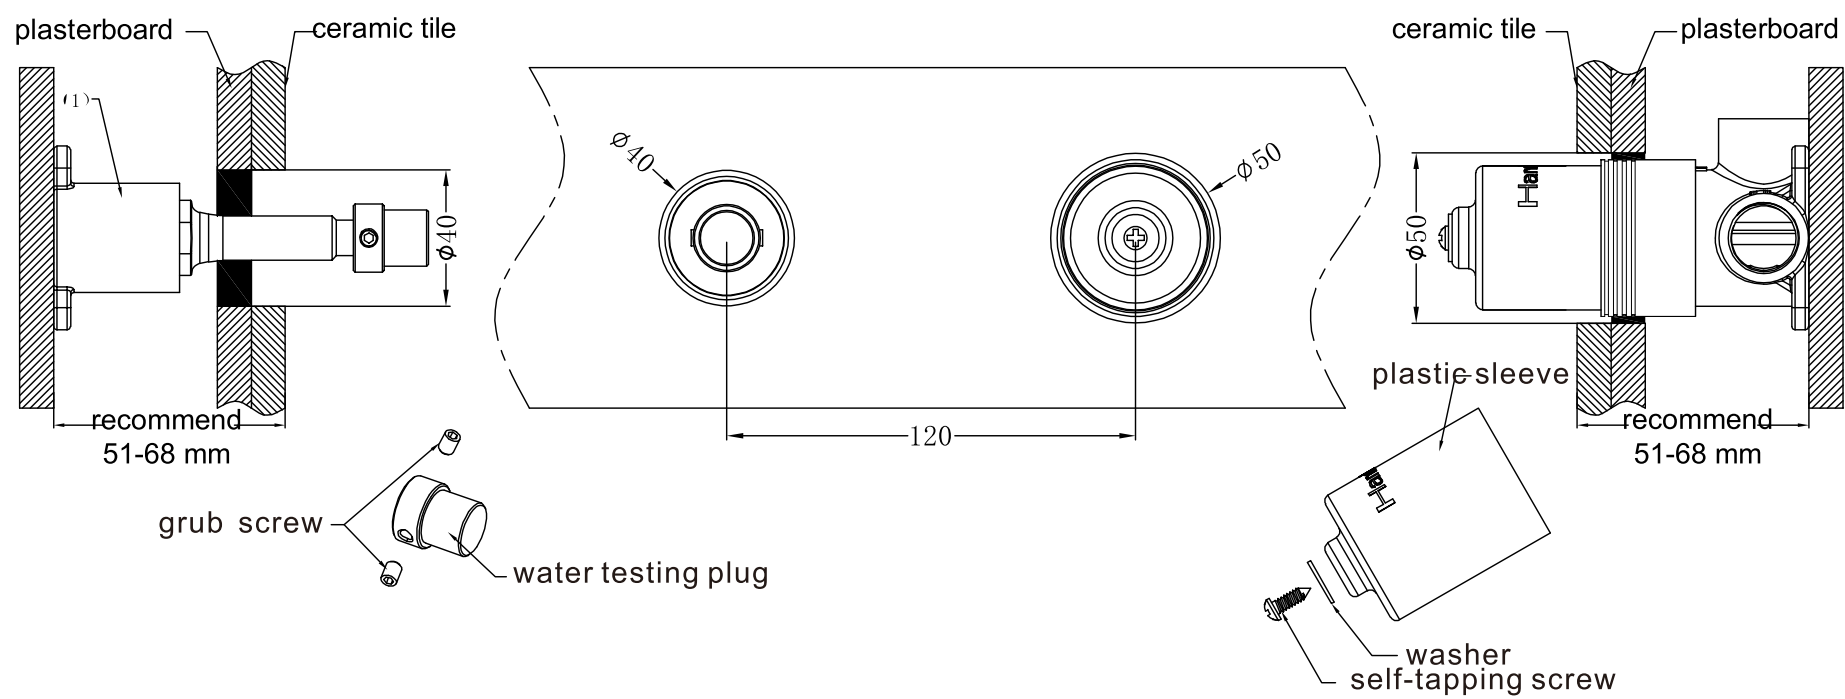

- 1. Drill a 50mm and a 40mm hole in the ceramic tile, then position it as shown in the above diagram.
- 2. Undo the self-taping screw to remove the plastic sleeve, and release the grub screws to remove the water testing.

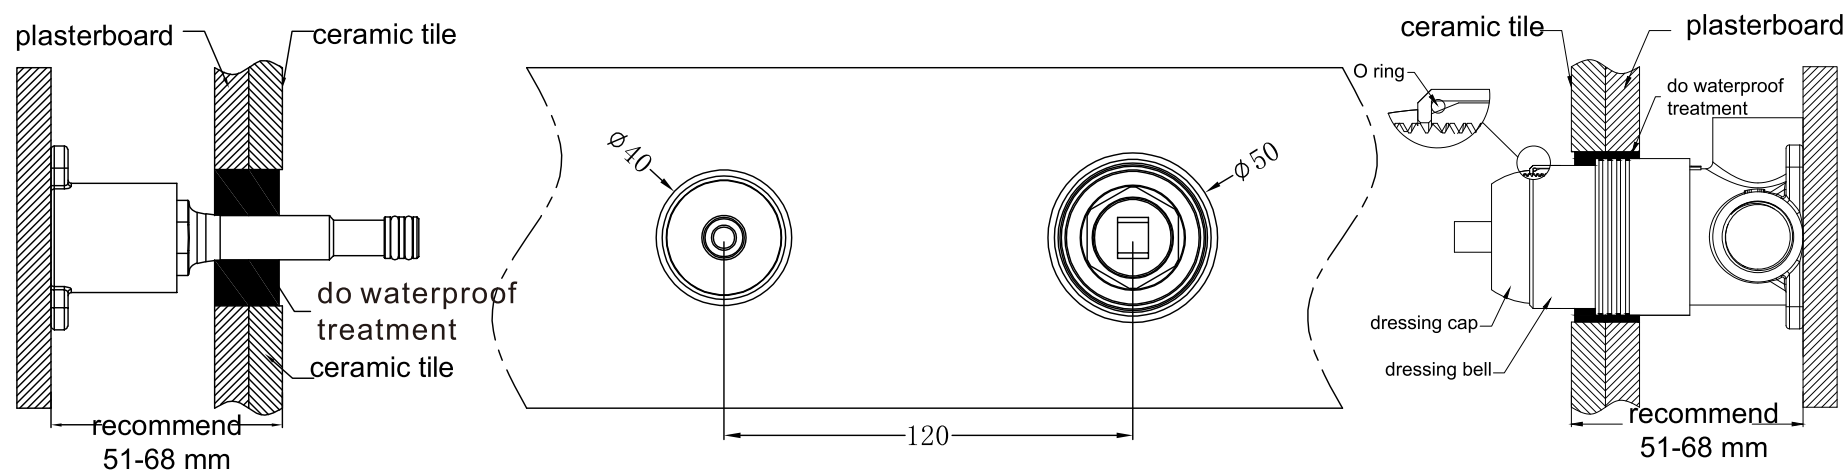

- 3. Insert the O ring to the dressing bell groove, and slide the dressing bell onto cartridge.
- 4. Apply waterproof treatment to the area indicated in the diagram above.
- 5. Tighten up the dressing ring on the cartridge bell.

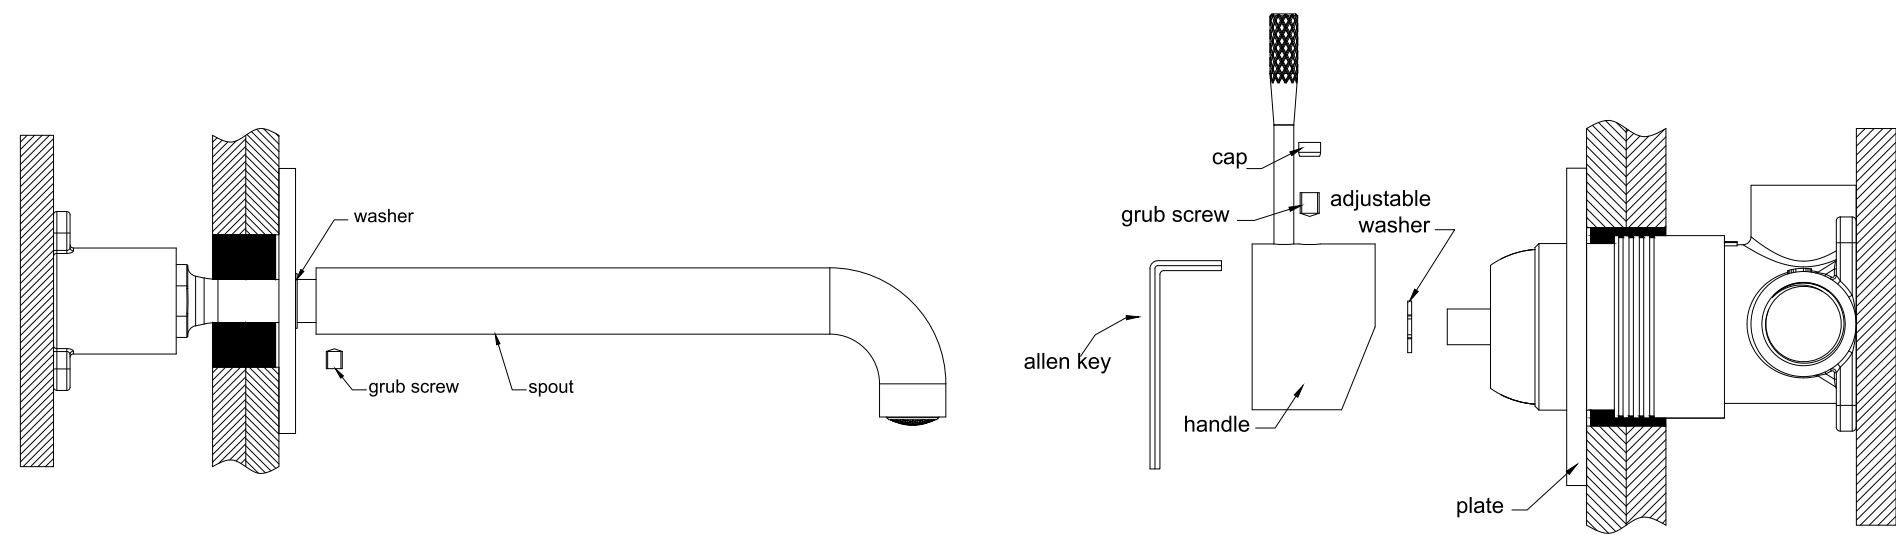

- 6. Slide the backplate and washer onto the wall, set the spout in place, and secure it tightly using the grub screw.
- 7. Attach the washer to the cartridge rod, position the handle, tighten it with a grub screw using an Allen key, and cap the grub screw hole.

Please note: there is a washer between backplate and the spout.

Nero

info@nerotapware.com.au
nerotapware.com.au

11-13 Buontempo Road
Carrum Downs Vic 3201

