



SCC1000-S, SCC1000B-S, SCC1000W-S // 100cm // SILENT White, Black or Stainless Steel



// SCC1000W-S (100 cm, matte white)

PA PERIMETER ASPIRATION	5YR WARRANTY	10YR* MOTOR WARRANTY
--------------------------------------	------------------------	-----------------------------------



// SCC1000S (100 cm, stainless steel)



// SCC1000B-S (100 cm, matte black)

The stylish and sophisticated SCC1000 ceiling cassette maintains uninterrupted views across your kitchen by being integrated seamlessly into the ceiling or bulkhead - perfect over island or peninsula style kitchen benches. Featuring finishes in stainless steel, matte white or matte black with and powerful silent extraction, this beautiful hood will complement any modern kitchen design. With the technology of Perimeter Aspiration, airflow is targeted towards the perimeter of the rangehood, creating a more intense extraction area.

For greater ease and convenience, a WIFI Integrated Smart Switch can be used to connect this Schweigen Appliance to any home automated software such as Google Home or Alexa for voice-activated controls. Now you can power up and shut down your Schweigen Appliance without lifting a finger. *This integration requires the services of a licensed electrician with reference to the third party device's installation and operating manual.

PRODUCT DESCRIPTION ISODRIVE® OPTIONS



- | | |
|--|--|
| <ul style="list-style-type: none"> • stainless steel, matte black and white finishes available • Perimeter Aspiration • ceiling/bulkhead cassette rangehood • silent Isodrive® motor system • 2 x aluminium, dishwasher safe filters • free ducting • simple wall switch operation (wall switch is not provided) • 5 Year Warranty on canopy | <ul style="list-style-type: none"> • SP single external motor <ul style="list-style-type: none"> - 1600 m³/h airflow - 200mm SteelFlex™ ducting (6m) - install roof/wall - rated power: 155W • SILN single inline motor <ul style="list-style-type: none"> - 1600 m³/h airflow - 200mm SteelFlex™ ducting (4m) - 200mm SteelFlex™ ducting (2m) - rated power: 155W • SE single external motor <ul style="list-style-type: none"> - 3200 m³/h airflow - 250mm SteelFlex™ ducting (4m) - 200mm SteelFlex™ ducting (2m) - SE accessory kit required - install roof/wall - rated power: 137W |
|--|--|

TECHNICAL DATA

- SCC1000** (including variants)
- dimensions: (W x D)
1000 x 700 mm



SCC1000-S, SCC1000B-S, SCC1000W-S // 100cm // SILENT White, Black or Stainless Steel

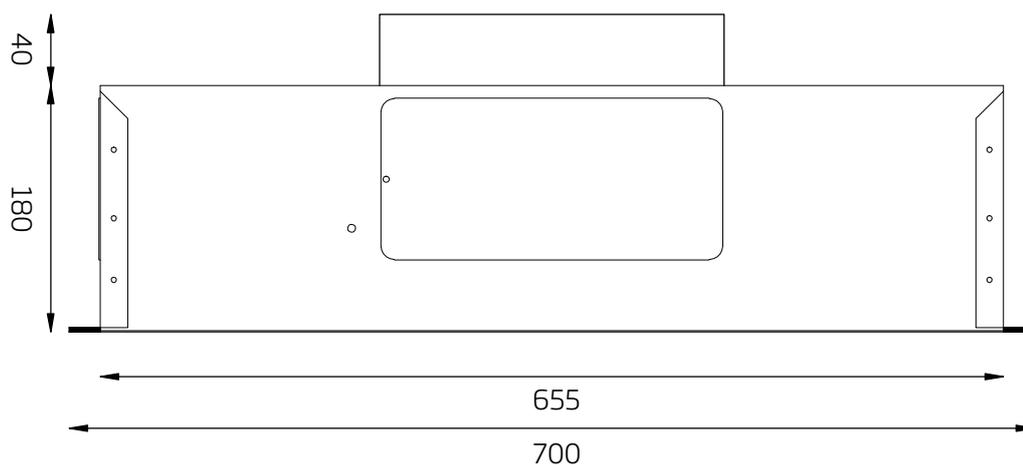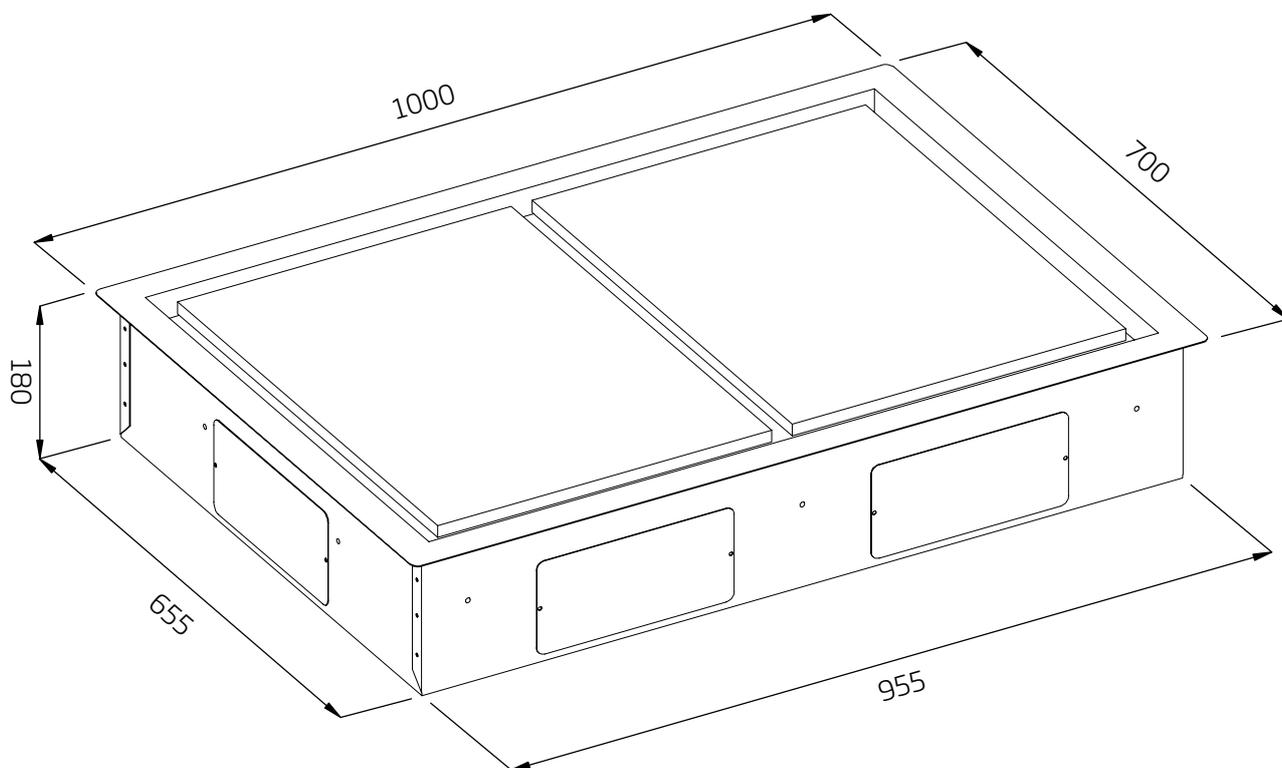

Model: SCC1000-S
SCC1000B-S
SCC1000W-S

Feeding Voltage: 220-240V 50Hz