


Bassini Plus

Shower Mixer With Diverter


Trim Kits Only



Lead Free

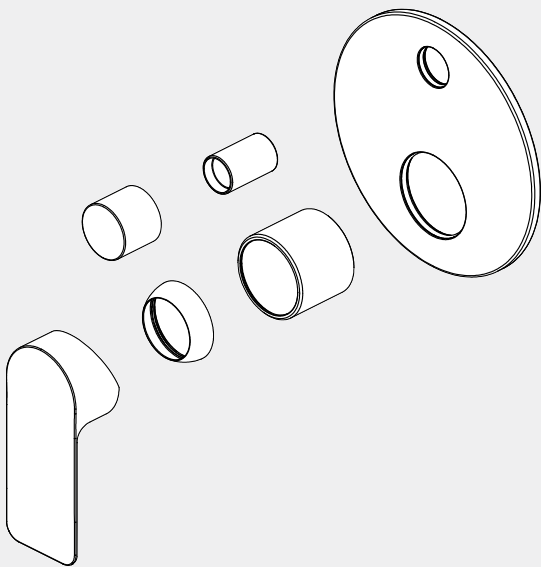

Versions:202510

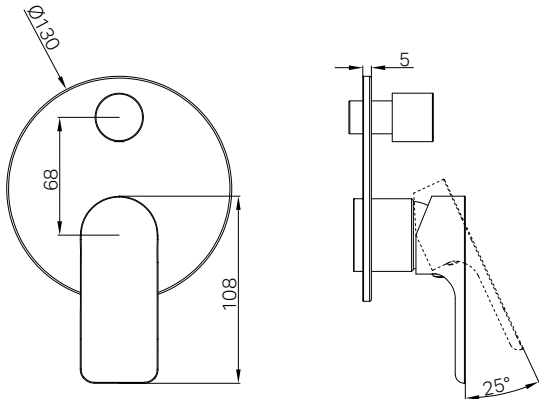
Drawing	Specifications	Packaging Includes	
	Watermark License WM-060073	1x Plate 1x Handle 1x Diverter Knob 1x Diverter Sleeve 1x Cartridge Bell 1x Dressing Ring 1x Installation Kits	
	Temperature Rating Min 1°C-Max 75°C		
	Pressure Rating Min 150kpa - Max 500kpa		
	Finish & SKU		
	 Chrome 25C017CH	 Gun Metal 25C017GM	 Brushed Nickel 25C017BN
	 Matte Black 25C017MB	 Brushed Gold 25C017BG	

*Dimensions are nominal measurements only.


INSTALLATION INSTRUCTION

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

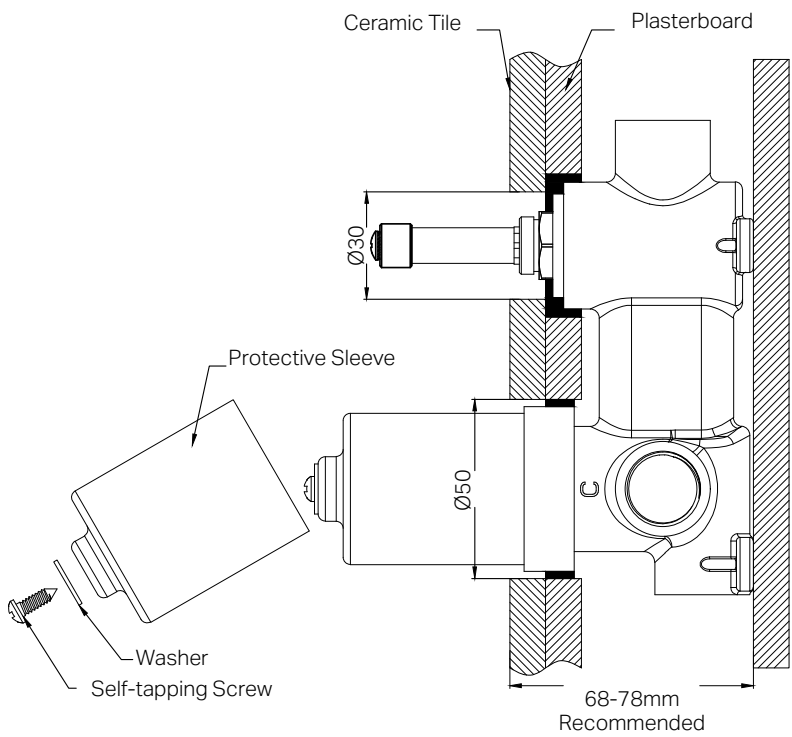

1. Drill a Ø50mm and a Ø30mm hole in the ceramic tile, then position it as shown in the above diagram.
2. Undo the self-tapping screw to remove the protective sleeve .

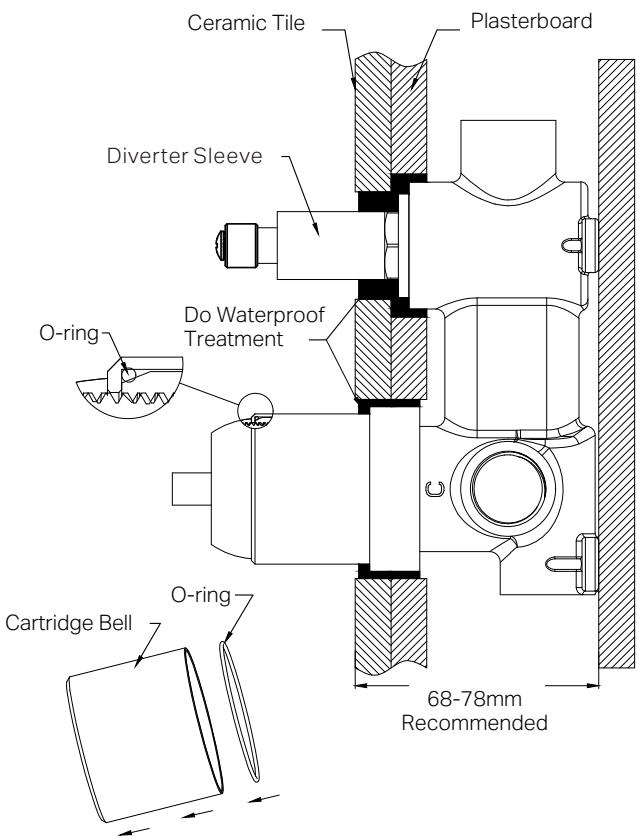

3. Insert the O ring to the Cartridge Bell groove, and slide the Cartridge bell onto cartridge and slide Diverter sleeve onto Diverter cartridge.
4. Apply waterproof treatment to the area indicated in the diagram above.
5. Thread the dressing cap on the cartridge bell.

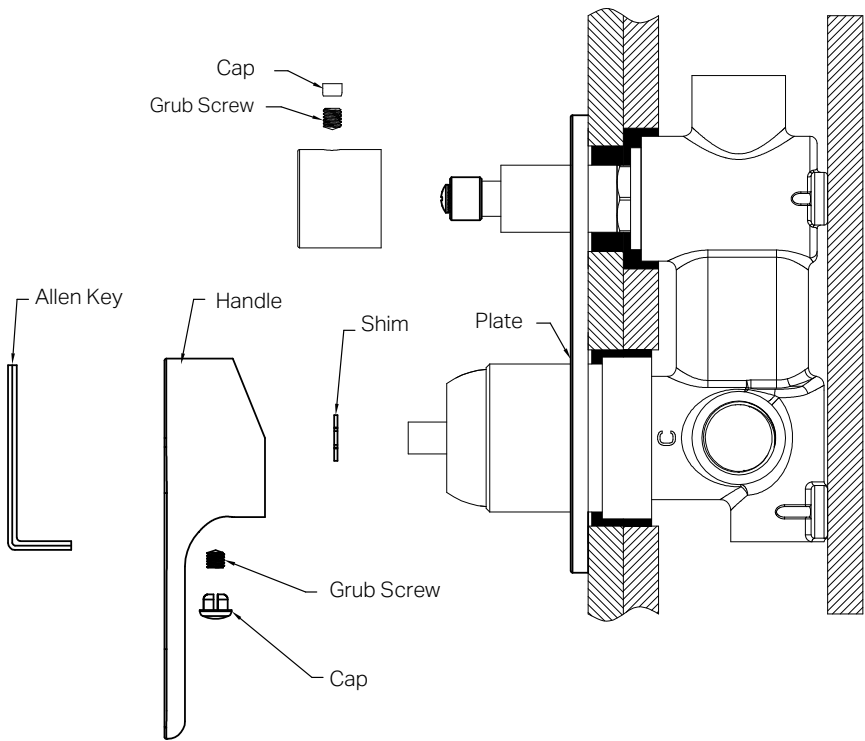

6. Slide the backplate onto body.
7. Attach the shim to cartridge rod, position the handle, Thread it with a grub screw using an Allen key, and cap the grub screw hole.
8. Attach the Diverter knob to Diverter cartridge, Thread it with grub screw using Allen key, and cap the grub screw hole.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

