


Senza Plus

Shower Mixer With Diverter


Trim Kits Only



Lead Free

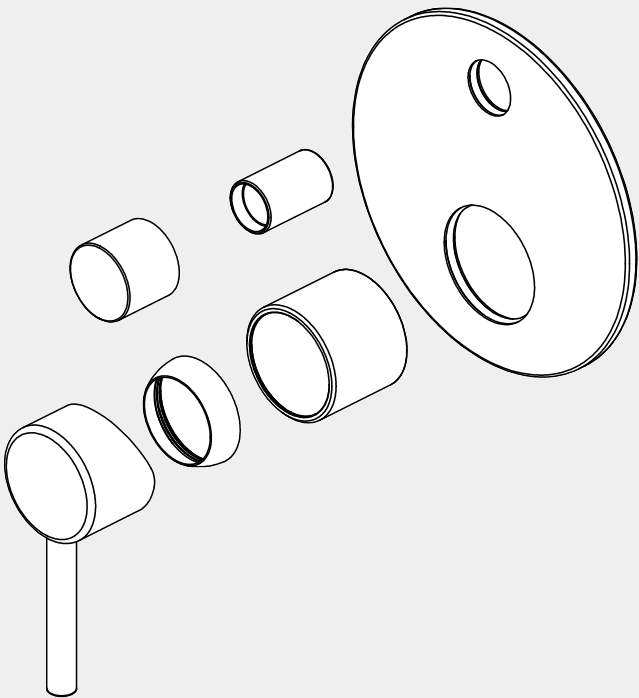

Versions:202510

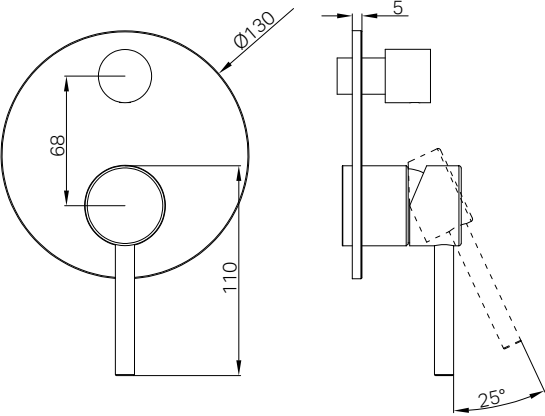
Drawing	Specifications	Packaging Includes						
	Watermark License WM-060073 Temperature Rating Min 1 °C-Max 75 °C Pressure Rating Min 150kpa - Max 500kpa Finish <table><tr><td> Chrome 25C040CH</td><td> Gun Metal 25C040GM</td><td> Brushed Nickel 25C040BN</td></tr><tr><td> Matte Black 25C040MB</td><td> Brushed Gold 25C040BG</td><td></td></tr></table>	 Chrome 25C040CH	 Gun Metal 25C040GM	 Brushed Nickel 25C040BN	 Matte Black 25C040MB	 Brushed Gold 25C040BG		1x Plate 1x Handle 1x Knob 1x Sleeve 1x Cartridge Bell 1x Dressing Ring
 Chrome 25C040CH	 Gun Metal 25C040GM	 Brushed Nickel 25C040BN						
 Matte Black 25C040MB	 Brushed Gold 25C040BG							

*Dimensions are nominal measurements only.


INSTALLATION INSTRUCTION FOR TRIM KITS ONLY

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

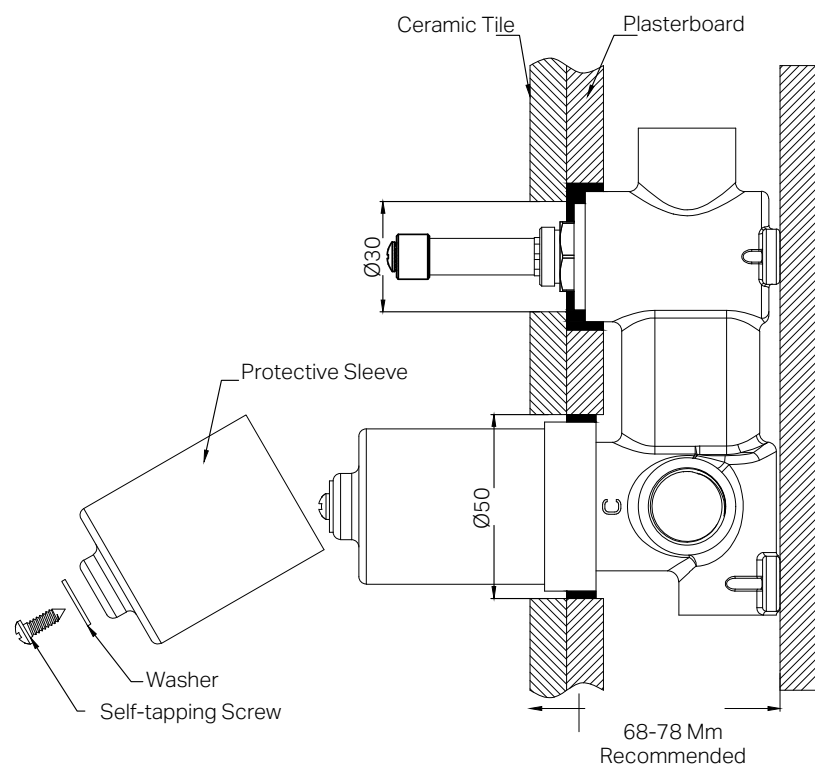

1. Drill a Ø50mm and a Ø30mm hole in the ceramic tile, then position it as shown in the above diagram.
2. Undo the self-tapping screw to remove the plastic sleeve.

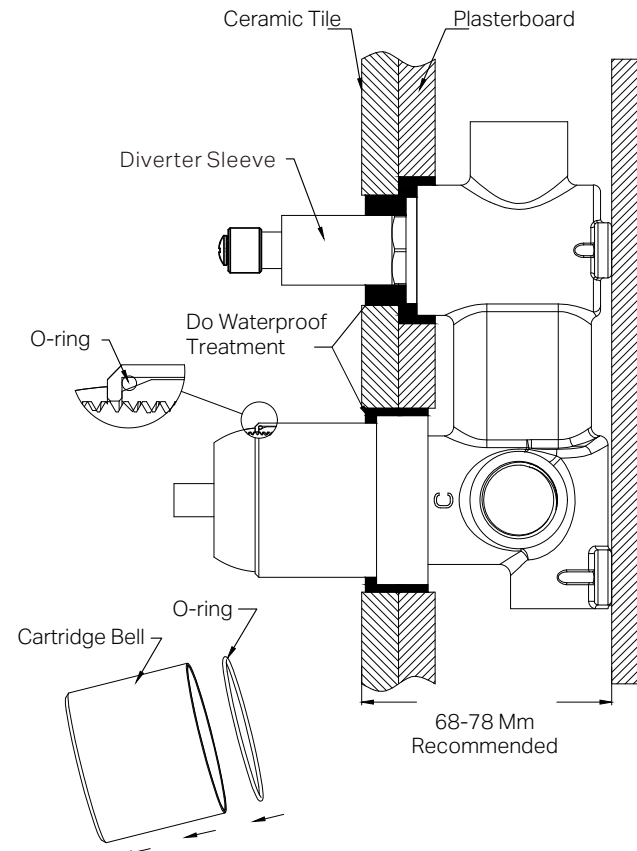

3. Insert the O-ring to the dressing bell groove, and slide the cartridge bell onto cartridge and slide Diverter dressing bell onto Diverter cartridge.
4. Apply waterproof treatment to the area indicated in the diagram above.
5. Tighten up the dressing ring on the cartridge bell.

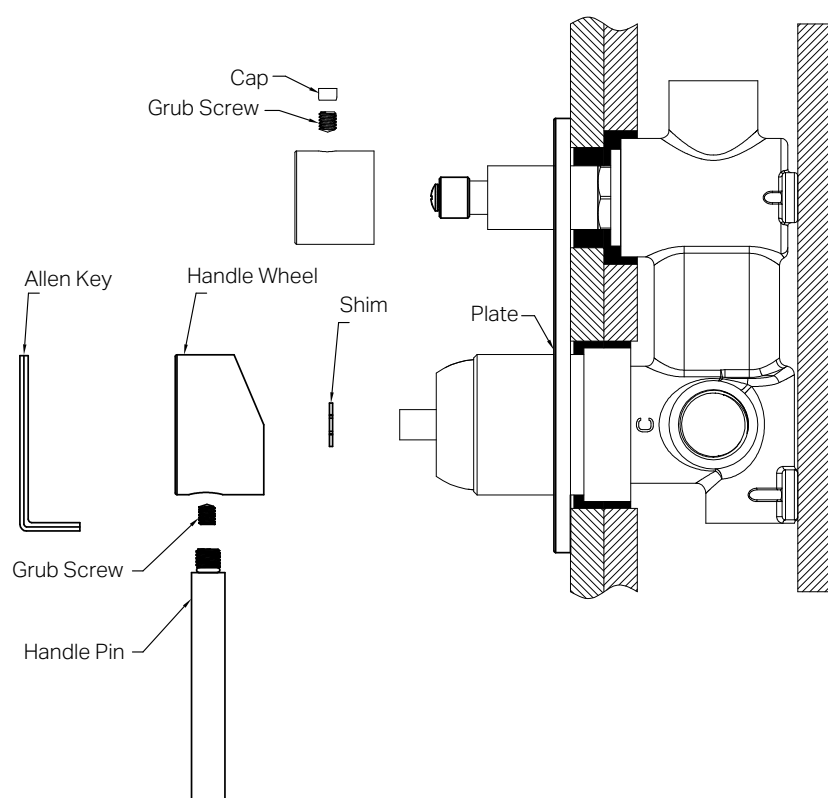

- Slide the backplate onto body.
- Attach the shim to cartridge rod, position the handle wheel, tighten it with a grub screw using an Allen key, and screw the handle pin into the handle wheel.
- Put knob onto diverter cartridge, tighten it with grub screw using Allen key, and cap the grub screw hole.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

