


Senza Plus
Wall Basin/Bath Mixer
Without Backplate
185mm Spout
Trim Kits Only




Lead Free

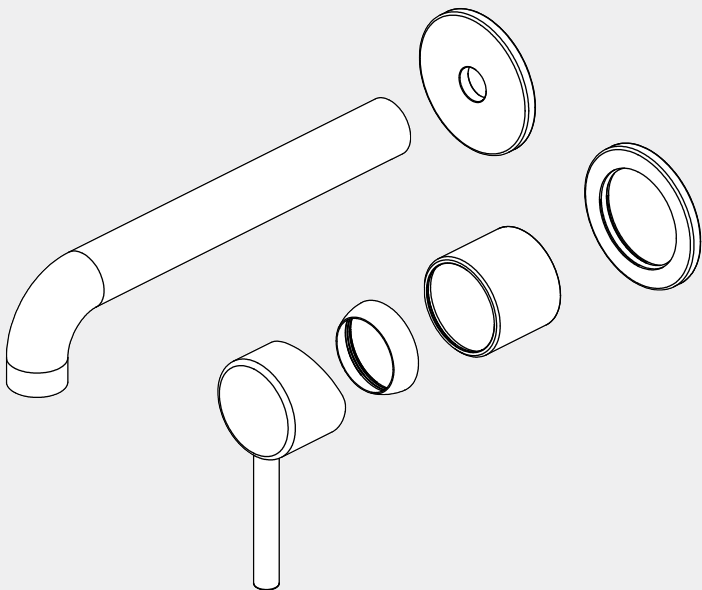

Versions:202510



Drawing

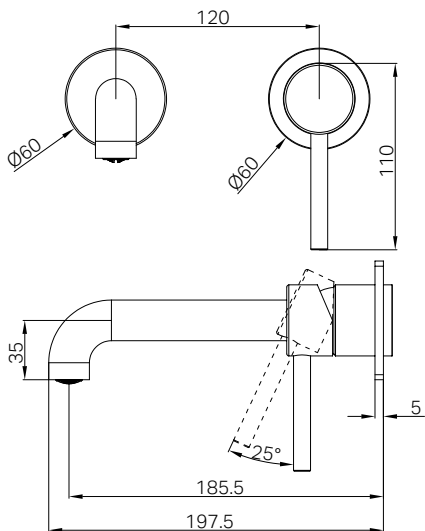

Specifications

Watermark License

WM-060073

Temperature Rating

Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

- 2x Plates
- 1x Handle
- 1x Spout
- 1x Cartridge Bell
- 1x Dressing Ring
- 1x Installation Kits
- 1x Non-Restricting Aerator

Finish & SKU

- | | | |
|---|--|--|
|  Chrome
25C036CH |  Gun Metal
25C036GM |  Brushed Nickel
25C036BN |
|  Matte Black
25C036MB |  Brushed Gold
25C036BG | |


*Dimensions are nominal measurements only

**Includes an additional non-restricting aerator for bath use


INSTALLATION INSTRUCTION

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

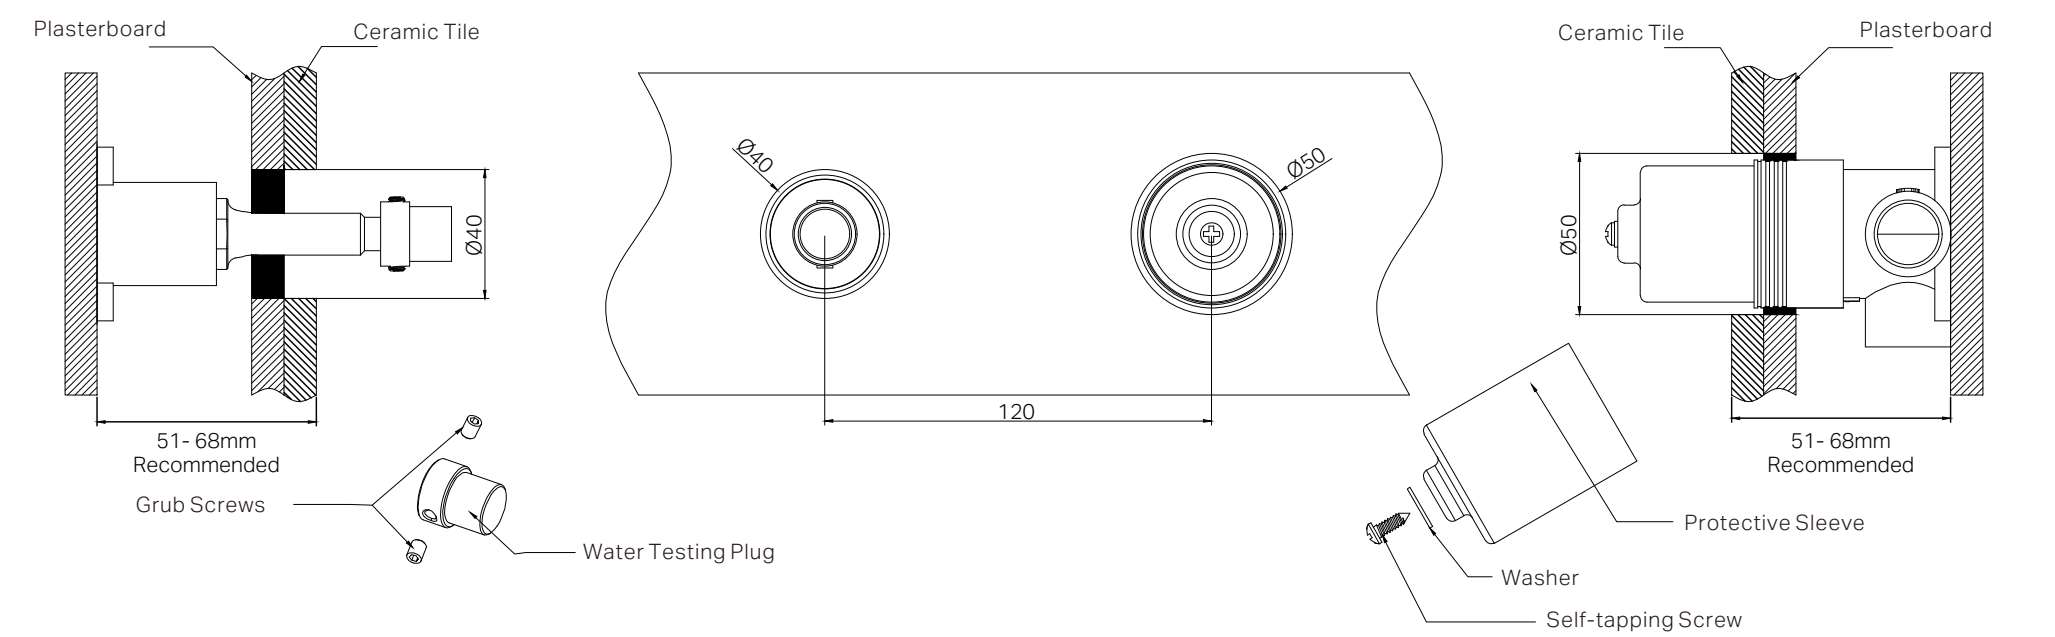

1. Drill a Ø50mm and a Ø40mm hole in the ceramic tile, then position it as shown in the above diagram.
2. Undo the self-taping screw to remove the protective sleeve, and release the grub screws to remove the water testing plug.

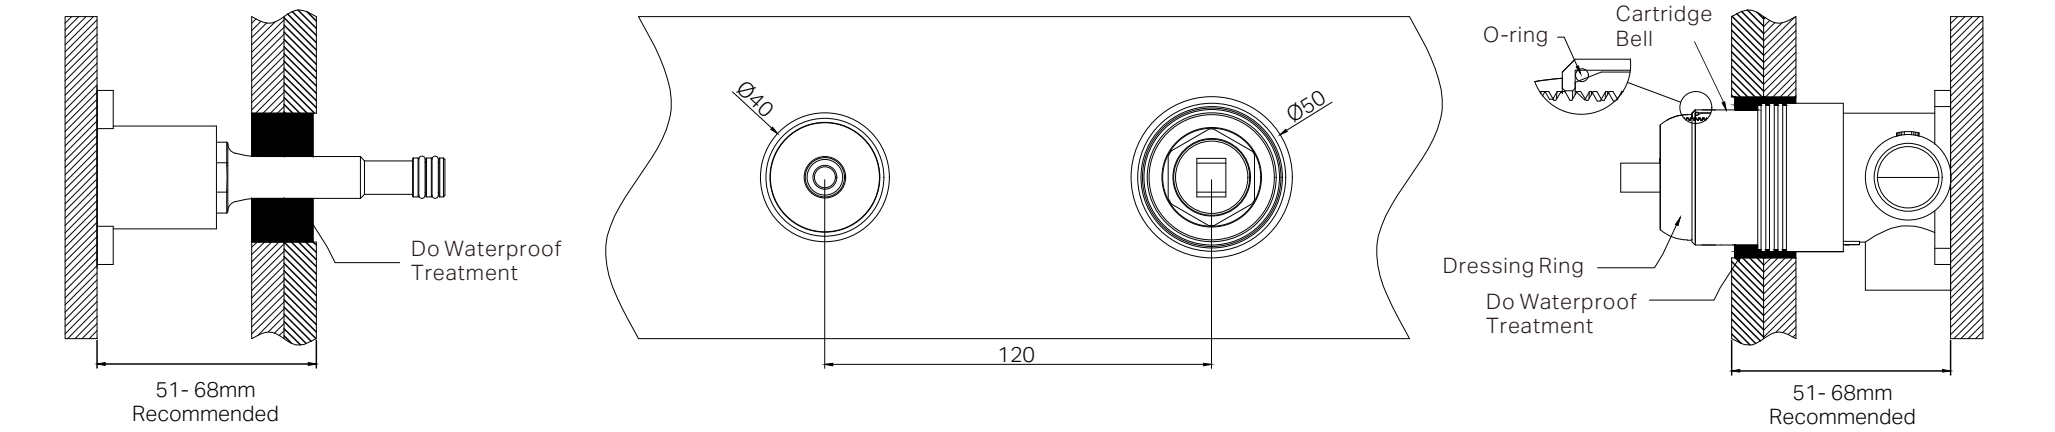

3. Insert the O ring to the cartridge bell groove, and slide the cartridge bell onto cartridge.
4. Apply waterproof treatment to the area indicated in the diagram above.
- 5.Thread the dressing ring on the cartridge bell.

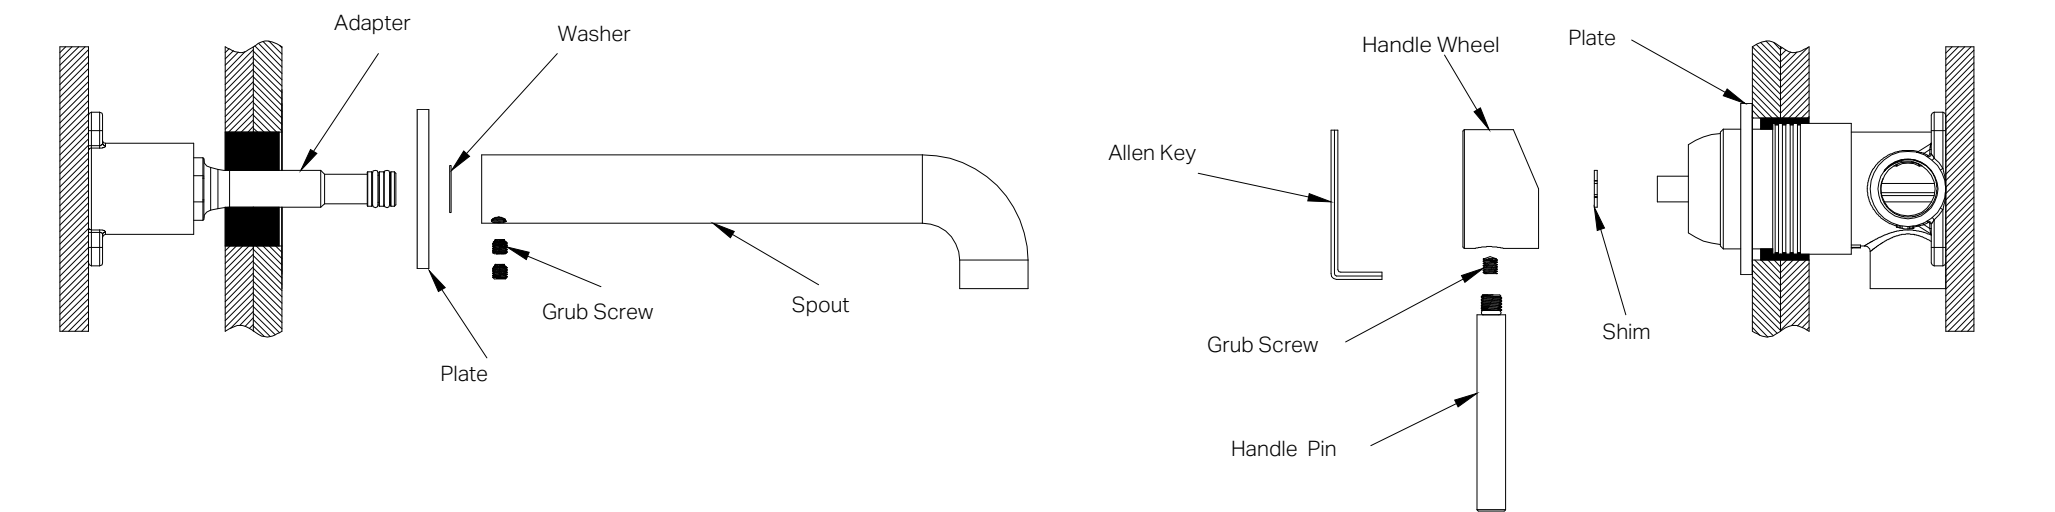

6. Slide the backplate and washer onto the wall, set the spout in place, and secure it tightly using the grub screw.
 7. Attach the shim to the cartridge rod, position the handle, tighten it with a grub screw using an Allen key, and screw the handle pin into the handle wheel.
- Please note: there is a washer between backplate and the spout.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

