



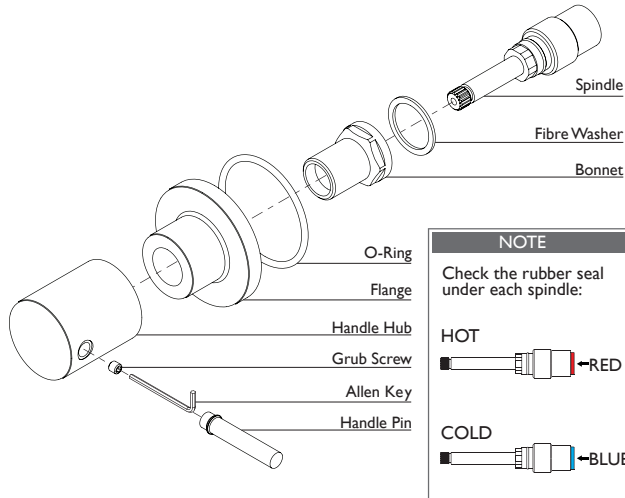

BREACH SET-UP


- Ensure that seats in the Breach are in good condition and are free from foreign objects.
- The recommended installation range for the Breach are as shown:
- Reseat if required.

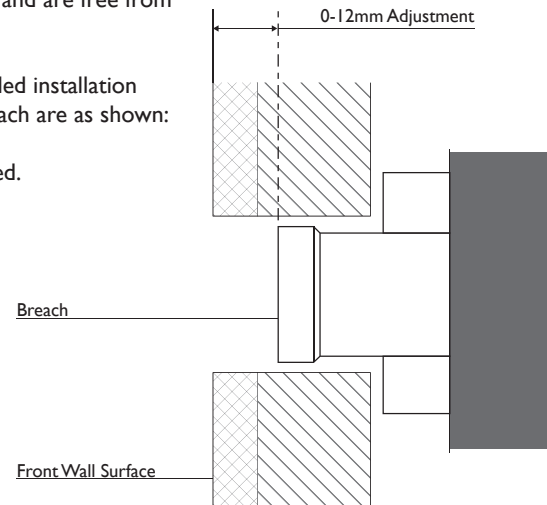

1

Firmly screw Spindle into the Breach.

DO NOT OVERTIGHTEN.

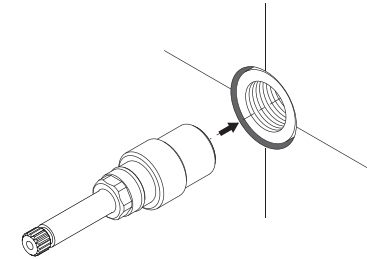


2

Temporarily fit the handle onto the Spine to check if it is horizontal when in the closed position.


If not, using a Spanner, adjust cartridge tightness to allow Handle Lever to be horizontal.

Remove the Handles when aligned.

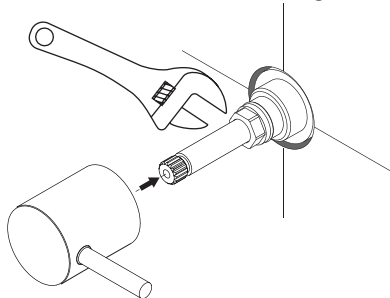

3


Fit Fibre Washer around the Spindle, then firmly fasten the Bonnet onto the Spindle using a spanner.

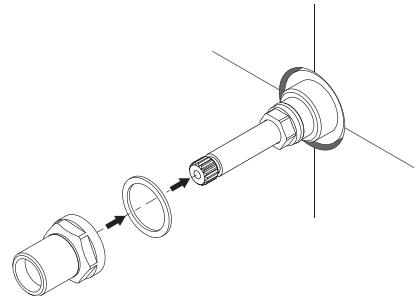

4

Fit O-Ring to the groove in the rear of the Flange.


Firmly fasten Flange onto the spindle.

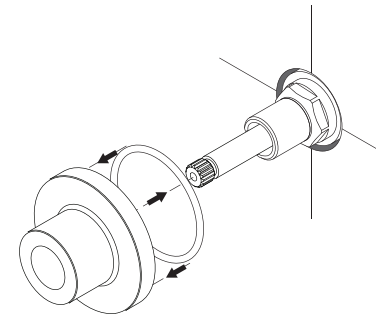

5

Fit Handle Hub to Spindle and fasten with the Grub screw using an Allen Key.

Screw the Handle Pin into the Handle Hub.

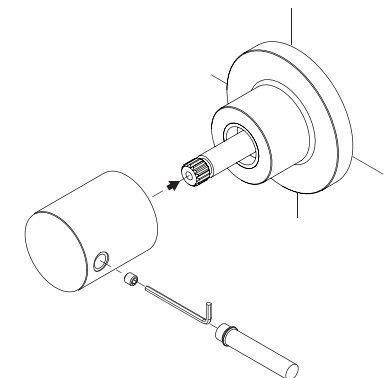

recommended
working pressure
150-500KPa
maximum hot
water temperature
75 degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.
- Showers may not be suitable for use within:
 - Gravity-fed water systems

- Some instantaneous hot water systems; or
 - Pressure supply less than 150kPa;
- NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

Failure to comply with the above may void all warranties.

WARRANTY:
Please refer to the full warranty statement enclosed with the product before installing.

MAINTENANCE AND CARE:

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:

While we aim to ensure the specifications shown are correct at the time of printing, we reserve the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.